

620F

Class 250, Non Rising Stem, Gate Valve

SUBMITTAL SHEET

"Apollo" Valves



Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO#:	
Rep:	
Wholesale Dist.:	

DESCRIPTION

The Apollo International™ Model 620F Flanged Cast Iron Gate Valve provides full flow capabilities. The Model 620F Gate Valve can be reliably installed in plumbing and heating systems (or building service piping).

FEATURES

- Compatible with ANSI 250# & 300# Flanges
- Full Port
- Bronze Mounted Seat Rings/Trim
- Solid Wedge
- Adjustable Graphite Stem Packing
- Non-Rising Stem
- Flanged Connection
- Bolted Bonnet
- Rugged Iron Hand Wheel
- Back Seat Protection

PERFORMANCE RATING

- Saturated Steam: 250 psi (17.2 bar) at 406°F (207°C)
- Cold Working Pressure: 500 psi (34.5 bar) at 100°F
- Temperature Range: -20°F to 406°F

APPROVALS

- MSS SP-70 - Gray Iron Gate Valves Flanged and Threaded - Type I
- ASME B16.10 - Face-to-Face and End-to-End Dimensions of Valves

STANDARD MATERIALS LIST

1	BODY	Cast Iron (ASTM A 126 CL B)
2	SEAT RINGS	Cast Bronze (ASTM B62)
3	WEDGE FACE RINGS	Cast Bronze (ASTM B62)
4	WEDGE	Cast Bronze (ASTM B62)
5	WEDGE NUT	Cast Bronze (ASTM B62)
6	STEM	Brass (ASTM B16)
7	BODY GASKET	Graphite (Asbestos Free)
8	BOLTS	Carbon Steel (ASTM A307 B)
9	NUTS	Carbon Steel (ASTM A307 B)
10	BONNET	Cast Iron (ASTM A 126 CL B)
11	GLAND FOLLOWER BOLTS	Carbon Steel (ASTM A307 B)
12	STUFFING BOX GASKETS	Graphite (Asbestos Free)
13	STUFFING BOX	Cast Iron (ASTM A 126 CL B)
14	PACKING	Graphite (Asbestos Free)
15	GLAND FOLLOWER	Ductile Iron (ASTM A536 65-45-12)
16	PACKING GLAND	Cast Bronze (ASTM B584)
17	HANDWHEEL	Cast Iron (ASTM A 126 CL B)
18	NAMEPLATE	Aluminum
19	WASHER	Carbon Steel (ASTM A307 B)
20	HANDWHEEL NUT	Ductile Iron (ASTM A536 65-45-12)

PART NUMBER MATRIX

Size (in.)	Part Number
2"	6GA208B1
2-1/2"	6GA209B1
3"	6GA200B1
4"	6GA20AB1
6"	6GA20CB1
8"	6GA20EB1
10"	6GA20GB1
12"	6GA20HB1


* The lead free version of this valve is a running change. Contact customer support for availability.

620F

Class 250, Non Rising Stem, Gate Valve

SUBMITTAL SHEET

"Apollo" Valves

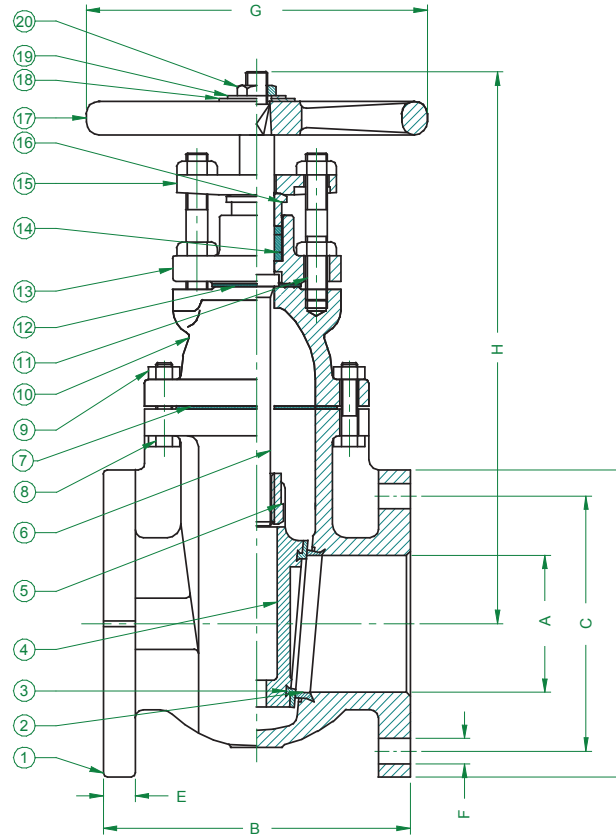

Size (in.)	Dimensions (in.)								Wt. (lbs.)	Cv (Typ)
	A	B	C	D	E	F	G	H (Open)		
2"	2.00	8.50	5.00	6.50	0.88	0.75	7	11.28	42	328
2.5"	2.50	9.50	5.88	7.50	1.00	0.88	7	12.72	55	482
3"	3.00	11.12	6.62	8.25	1.12	0.88	8	13.31	66	744
4"	4.00	12.00	7.88	10.00	1.25	0.88	10	16.18	115	1316
6"	6.00	15.88	10.62	12.50	1.44	0.88	12	22.00	205	3176
8"	8.00	16.50	13.00	15.00	1.62	1.00	14	25.59	278	5692
10"	10.00	18.00	15.25	17.50	1.88	1.12	16	30.31	456	8972
12"	12.00	19.75	17.75	20.50	2.00	1.25	18	33.90	633	13352

Cv = GPM @1 psi pressure drop, 60°F water

*Cv values are estimates only